


2432 SERIES

FFC/FPC CONNECTOR 1.00mm (0.039") NON ZIF

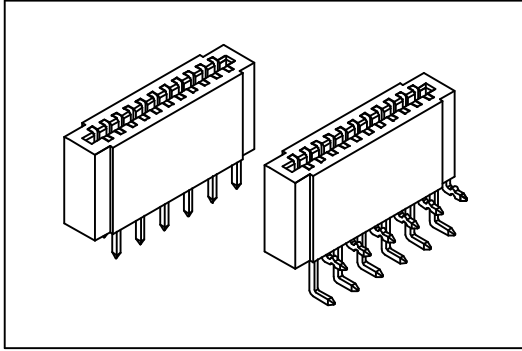

Material:











Housing: High temperature housing UL94V-0
withstands IR and VPR soldering methods.
Contacts: Phosphor Bronze.
Leg: Brass.
Plating: Tin plated.

Electrical Characteristics:

Current Rating: 1 AMP.
Insulator Resistance: 5000M Ω min. at DC 500V.
Contact Resistance: 20m Ω max. at DC 100mA.
Operating Temperature: -65°C ~+125°C.
Max Processing Temperature: 230°C for 30 to 60 seconds.

Features:

- * FFC/FPC Connection, Double Contact, Right angle, Straight and SMD type.
- * Size 3 through 32 available.
- * For 0.30mm(0.0118") thick FFC/FPC.



Position	3 Thru 32
Dimension	
A	(No. of Positions X 1.0)-1.0
B	(No. of Positions X 1.0)+1.1
C	(No. of Positions X 1.0)+3.4

Ordering information

2432- 32

Series

No. of
Pin Count

T

T: Tin Plated

S

S: Straight

R: Right Angle

D: S.M.D. Type